




SWP162

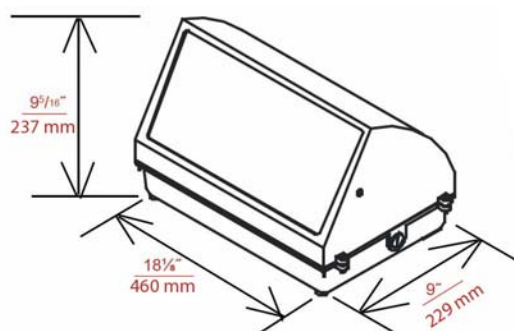

Applications:

Perimeter lighting for safety and security, Use on factories, warehouses, self storage, commercial buildings, entrances, walkways, underpasses, loading docks, recreation areas etc.

Housing:

Die cast aluminum housing & hinged front frame, 1/2" coin plugs, textured bronze powdercoat finish

Reflector:

Aluminum reflector

Lens:

Tempered clear glass lens, or etched flat glass lens.

Mounting:

Cast-in template for mounting directly over a 4" recessed outlet box, or use 1/2" surface conduit

Listing & Ratings:

UL: Listed to UL1598 for wet locations

Housing					
Item No	Description				
SWP162	Only housing,with E39 Socket,For Max MH/HPS250W				
SWP162CFLH	Only housing,with E39 Socket,For Max CFL105W				
Complete Units(with lamps)					
Item No	Wattage	Voltage	Ballast	Lamp	Socket
SWP162H250A	250	120	R-NPF	HPS	E39
SWP162H250AMT	250	Quad	CWA	HPS	E39
SWP162C105A	105	120	R-NPF	CFL	E39
SWP162PS250AMT	250	Quad	CWA	Pulse Start	E39

Parts:

SBV	SWP162GLC	SWP162GLE
Breather Vavel	Clear flat glass lens	Etched flat glass lens
