




SWP042

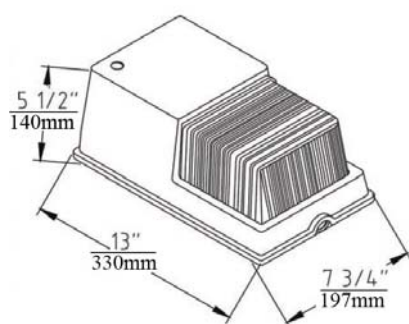

Applications:

Use for packing areas, entrances, walkways, underpasses, loading docks,

Housing:

Die cast aluminum housing and plate, textured bronze finish with conduit access on bottom & back, without photocell

Reflector:

Aluminum reflector

Lens:

Prismatic borosilicate glass lens

Mounting:

Optional cast aluminum mounting plate mounts directly over a 4" recessed outlet box, or use 1/2" surface conduit

Listing&Ratings:

UL:Listed to UL1598 for wet locations

Housing					
Item No	Description				
SWP042	Only housing,with E26 Socket,For Max MH/HPS100W				
SWP042PLH	Only housing, with GX24Q-4 socket, For Max PLT42W				
Complete Units(with lamps)					
Item No	Wattage	Volt age	Ballast	Lamp	Socket
SWP042H100A	100	120	R-NPF	HPS	E26
SWP042H100AMT	100	Quad	HX-HPF	HPS	E26
SWP042M100AMT	100	Quad	HX-HPF	MH	E26
SWP042M100A	100	120	R-NPF	MH	E26
SWP042PL42A	42	120~277	HPF	PLT	GX24Q-4

Parts:

SPHC
photocell

