

SWP342L



Project:

Type:

Prepared By:

Date:

FEATURES

- High Pressure Die Cast, Powder Coated Aluminum Housing
- Vacuum metalized reflector
- Ultra clear glass lens
- Recessed outlet box or directly to wall, Two-piece swivel bracket, Knuckle, Slip fitter, Aluminum Extrusion Mounting Arms available
- Top and Side Visors for optional
- Multi-chip, high-output, long-life LEDs
- >50,000 Hours Rated Lifespan
- 5-year Warranty
- Ambient Temperature -35 to 40 °C
- IP67 Rated LED Module
- ETL Wet Location Listed

APPLICATIONS:

- Building Exterior
- Parking Garage
- Security Lighting
- Walkway




LED/DRIVER

- Universal Input Voltage 120-277Vac 50/60 Hz
- Optional Input Voltage 249-528Vac 50/60 Hz
- Line to Earth 6KV Surge Protection
- IP67 Rated LED Driver and Module
- Power Factor > 0.90
- THD < 20%
- CRI > 70
- CCT : 4000K/5000K


ITEM NO	Input Wattage	Input Voltage	LED Module	Delivered Lumens	Luminaire Efficacy	COLOR TEMP(CCT)
SWP342L85	85W	120-277V	2	6120 LM	102 LM/W	5000 K
SWP342L60	60W	120-277V	2	8755 LM	103 LM/W	5000 K

DIMENSIONS

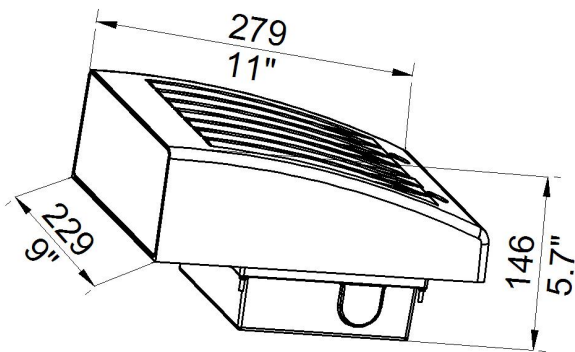


60W/85W

PHOTOMETRICS

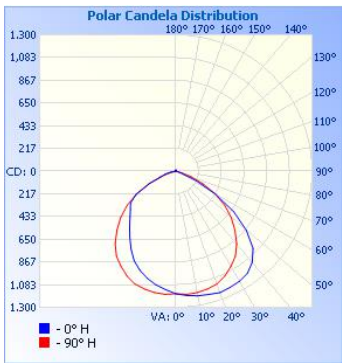

PARTS


Slip Fitter	Swivel Bracket	Top and Side Visors
		

SHIPPING DATA

Package: 32.3*26.8*19.3 CM

Approximate Net Weight: 5.9 KG

ORDERING CODES

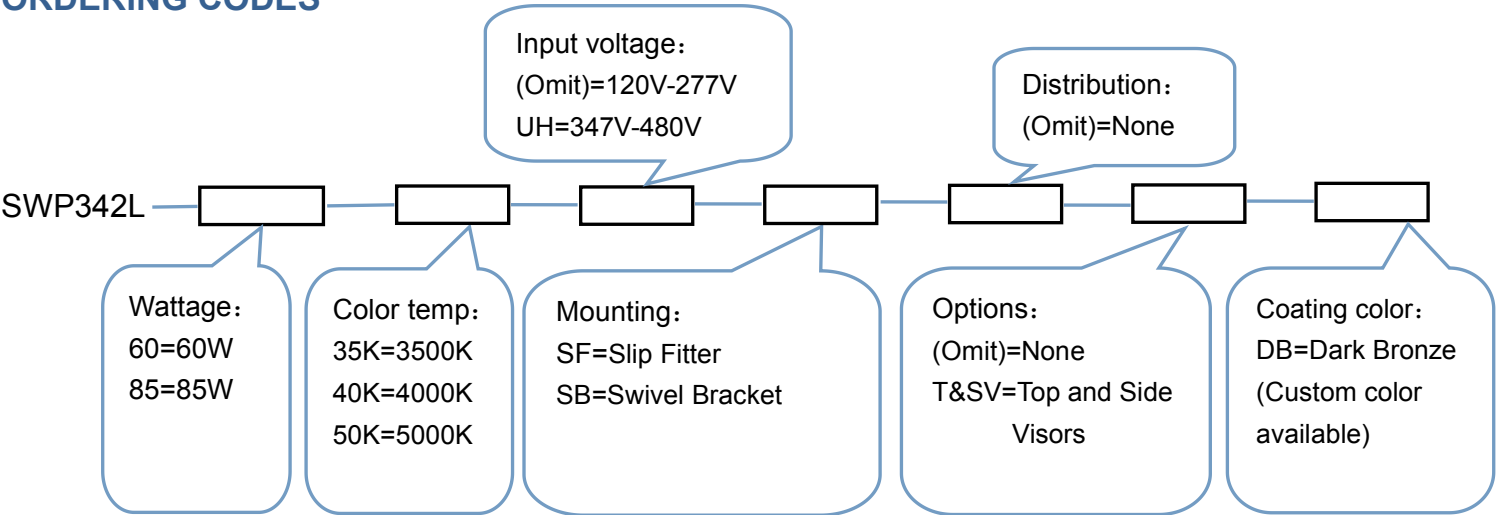

Typical Order Example:SWP342L-85-50K-KN-DB