


SHB502L



APPLICATIONS:

- Factories
- Foundries
- Machines shops
- Warehouse



Project:

Type:

Prepared By:

Date:

FEATURES


- High Pressure Die Cast, Powder Coated Aluminum Housing
- Polycarbonate optical lens standard, Frosted glass lens or Prismatic borosilicate glass lens for optional
- Hook Mount standard, Down Rod or Swivel Pendant for optional
- Long-life, high-efficiency surface mounting LEDs
- Integrated Motion Sensor for optional
- L70>50,000 Hours Rated Lifespan
- 5-year Warranty
- Ambient Temperature -35 to 40 °C
- Fixture Protection Class IP65
- ETL Wet Location Listed

LED/DRIVER

- Universal Input Voltage 120-277VAC 50/60 Hz
- Optional Input Voltage 249-528Vac 50/60 Hz
- Line to Earth 10KV Surge Protection
- IP67 Rated LED Driver
- Power Factor > 0.90
- THD < 20%
- CRI > 70
- CCT : 4000K/5000K


ITEM NO	Input Wattage	Input Voltage	LED Module	Delivered Lumens	Luminaire Efficacy	COLOR TEMP(CCT)
SHB502L150	150W	120-277V	1	17100 LM	114 LM/W	5000 K
SHB502L115	115W	120-277V	1	13570 LM	118 LM/W	5000 K
SHB502L95	95W	120-277V	1	11400 LM	120 LM/W	5000 K

DIMENSIONS

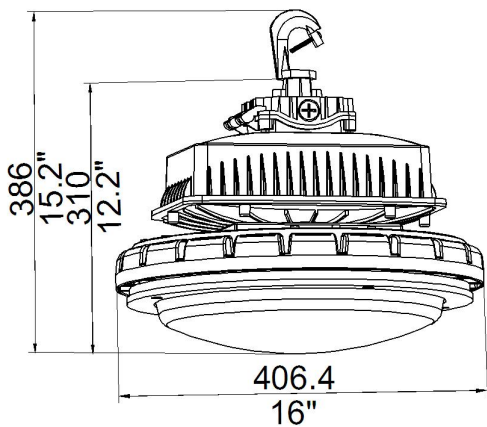

95W,115W,150W

PHOTOMETRICS

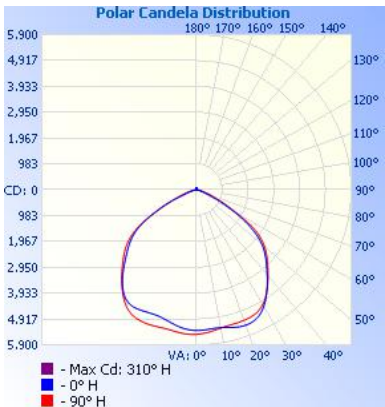

PART


Swivel Pendant	Frosted Glass lens	Prismatic Borosilicate glass lens	Wire Guard
			

SHIPPING DATA

Package: 49*49*33 CM

Approximate Net Weight: 7.4 KG

ORDERING CODES

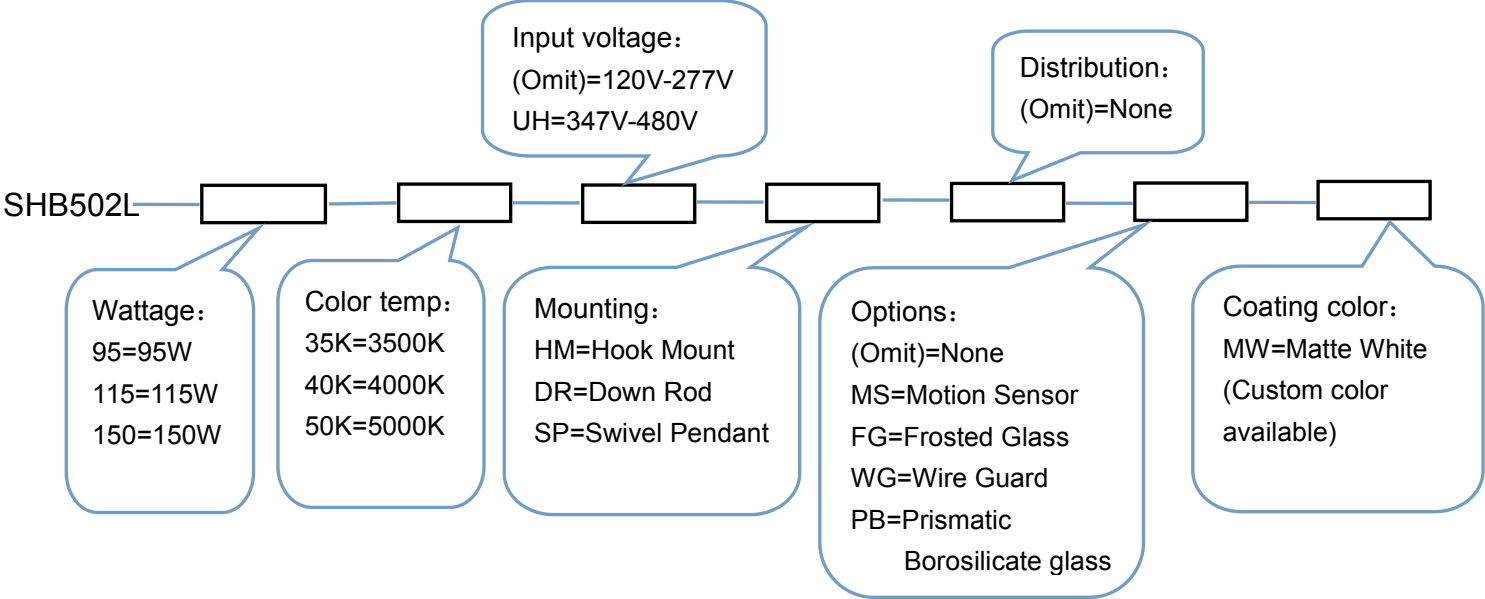

Typical Order Example:SHB502L-150-50K-HM-MW