

SVT4L



Project:

Type:

Prepared By:

Date:

FEATURES

- High strength impact resistance engineering plastics injection molding
- Standard Low gloss frosted and stripe polycarbonate lens
- Surface mount standard
- Long-life, high-efficiency surface mounting LEDs
- Integrated Emergency Battery for optional
- L70>50,000 Hours Rated Lifespan
- 5-year Warranty
- Ambient Temperature -35 to 40 °C
- ETL Wet Location Listed

APPLICATIONS:

- Supermarket
- Warehouse
- parking garage




LED/DRIVER

- Universal Input Voltage 120-277Vac 50/60 Hz
- Optional Input Voltage 249-528Vac 50/60 Hz
- Line to Earth 10KV Surge Protection
- IP67 Rated LED Driver
- Power Factor > 0.90
- THD < 20%
- CRI > 80
- CCT : 4000K/5000K


ITEM NO	Input Wattage	Input Voltage	LED Module	Delivered Lumens	Luminaire Efficacy	COLOR TEMP(CCT)	Lens
SVT4L40	40W	120-277V	1	4800 LM	120 LM/W	5000 K	Clear
SVT4L40	40W	120-277V	1	4400 LM	110 LM/W	5000 K	Gloss

DIMENSIONS

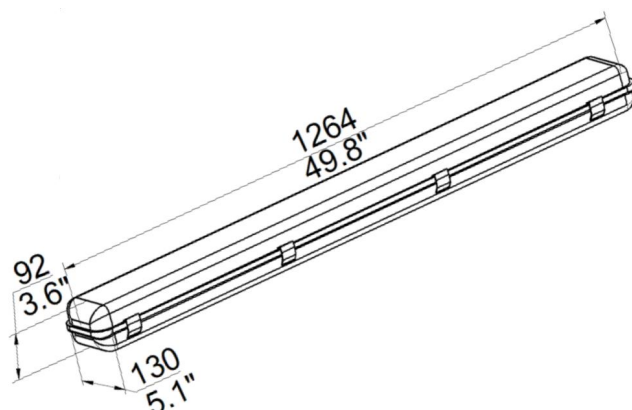

40W

PHOTOMERTRICS

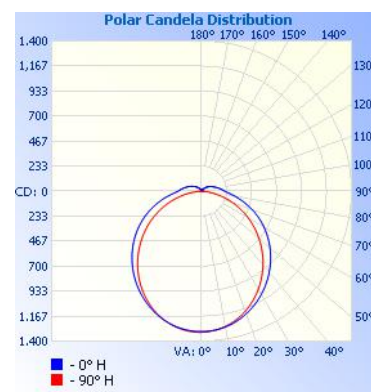

MOUNT WAY


None

SHIPPING DATA

Package: 128*14.5*11 CM

Approximate Net Weight: 4.5 KG

ORDERING CODES

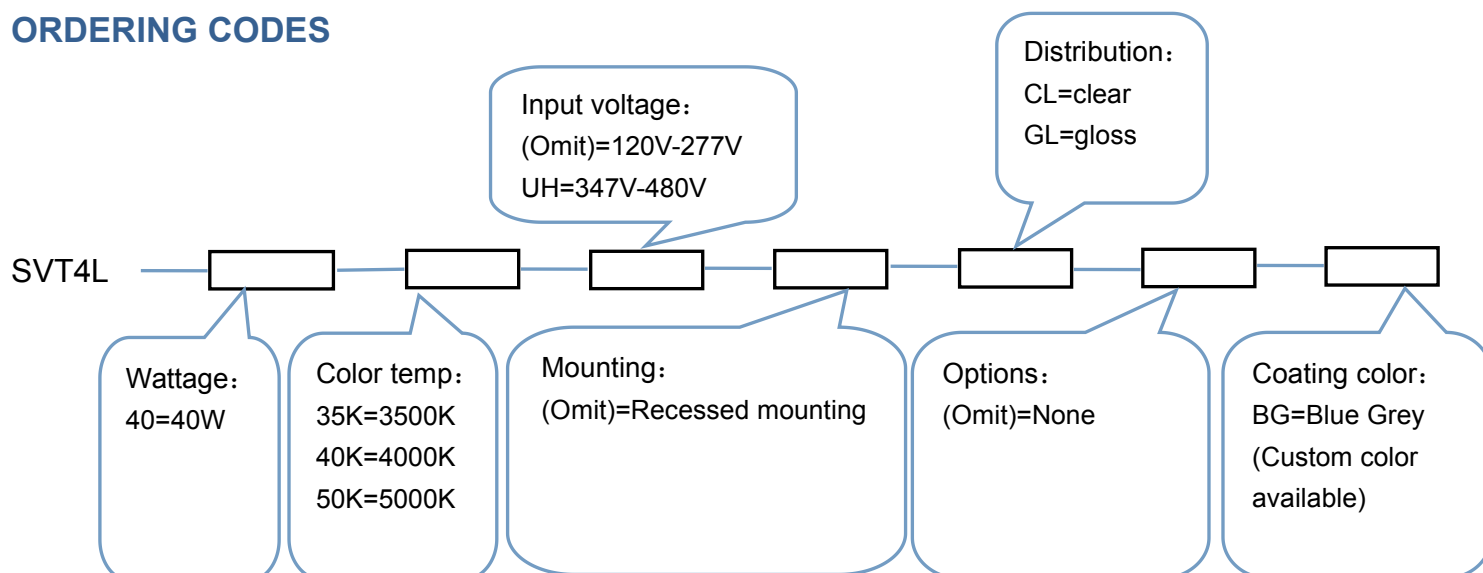

Typical Order Example:SVT4L-40-50K-BG