

SRW323L



Project:

Type:

Prepared By:

Date:

FEATURES

- Die cast housing with smooth powder coat finish , with a hinged front frame with latch and locking device for tool-less entry
- Glass optical lens: Type II Short
- Mounts on standard arm
- Multi-chip, high-output, long-life LEDs
- L70>50,000 Hours Rated Lifespan
- 5-year Warranty
- Ambient Temperature -35 to 40 °C
- Fixture Protection Class IP65

APPLICATIONS:

- Street Lighting
- Intersections
- Parking lots
- Public Areas




LED/DRIVER

- Universal Input Voltage 120-277Vac 50/60 Hz
- Line to Earth 6KV Surge Protection
- IP67 Rated LED Driver
- Power Factor > 0.90
- THD < 20%
- CRI > 70
- CCT : 4000K/5000K

ITEM NO	Input Wattage	Input Voltage	LED Module	Delivered Lumens	Luminaire Efficacy	COLOR TEMP(CCT)
SRW323L120	120W	120-277V	2	12000 LM	100 LM/W	5000 K
SRW323L100	100W	120-277V	2	10000 LM	100 LM/W	5000 K


DIMENSIONS

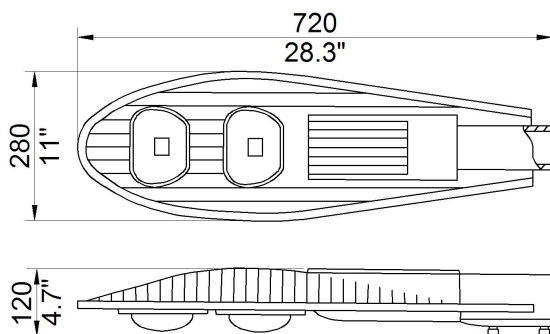

100W/120W

PHOTOMETRICS

Type II



PARTS


None

SHIPPING DATA

Package: 76*30*14 CM

Approximate Net Weight: 5.3 KG

ORDERING CODES

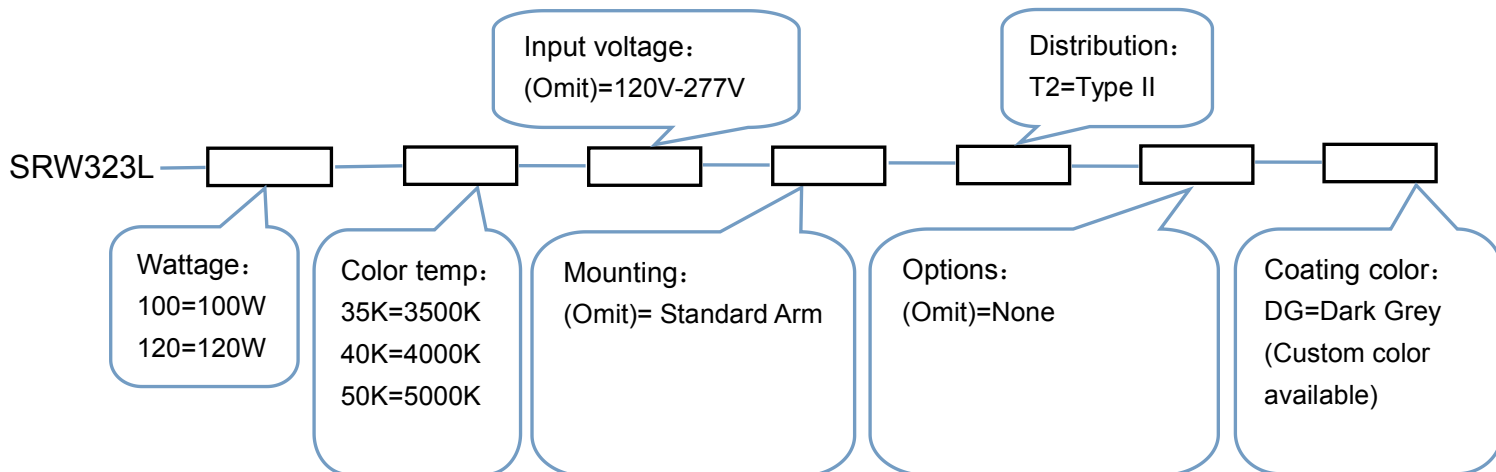

Typical Order Example: SRW323L-120-50K-T2-DG